AZECA™

Ditch the Wire!

Stereo Bluetooth® *Transmitter*

Owner's Manual

Bluetooth®

Model BTT005

Thank you for choosing the Azeca Bluetooth *Transmitter Model BTT005. Please read the user's manual carefully before use.*

Features

- Add stereo *Bluetooth*® to any device with a headphone jack
- Great for MP3 players and computers*
- Includes Velcro for attaching to various devices
- Charge and listen simultaneously

Includes

- Stereo *Bluetooth* transmitter
- USB charging cable
- Velcro
- User's manual
- Warranty card

Note:
Even though the paired device and this transmitter support the same *Bluetooth* profiles, functions may vary due to specification differences of the paired devices.

*** Disclaimer**
To pair a device to this transmitter the device must support the A2DP *Bluetooth* profile. Attaching this transmitter to a phone, music player, or computer requires a 3.5 mm stereo headphone jack or a 3.5 mm to 6.3 mm stereo jack adapter.

Using the Transmitter

Overview

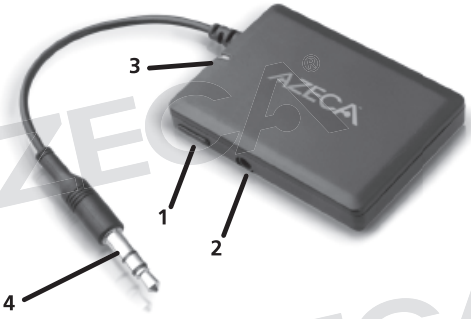

1	Multi-function button (MFB)
2	Charging jack
3	LED indicator
4	3.5mm audio-in plug

Getting started

1. Charging BTT005

The BTT005 comes with a built-in rechargeable battery, prior to using it, it is recommended to charge the battery fully for the first time. The LED flashes red when the BTT005 is at low power.

Connect the USB charging cable to an available UPS port and the charger plug to the charging jack of BTT005. A red LED is on while charging. It takes about 3 hours to charge the battery fully. When charging is completed, red LED will turn off.

2. Turning the BTT005 on/off

FUNCTION	OPERATION	LED indicator
Switching on BTT005	Press MFB button for 3-5 seconds	Blue LED is on for 1second
Switching on BTT005	Press MFB button for 3-5 seconds	Red LED is on for 1 second and then off

3. Pairing with Bluetooth devices

The general pairing steps are as follows:

1) Make sure BTT005 is off.
2) Keep BTT005 and your Bluetooth stereo receiver within 3 feet.
3) Turn on your Bluetooth stereo receiver and enter pairing mode.
4) Press and hold MFB button of BTT005 for 7 to 9 seconds and release it when the LED flashes red and blue alternately. The BTT005 is now in pairing mode.
5) BTT005 will automatically search for a Bluetooth stereo receiver and complete the connection.
6) After connecting, the blue LED of BTT005 flashes twice every 4 seconds;
7) Connect BTT005 to your music player through 3.5mm audio-out jack to play music.

Note:

- The pairing mode will last 1 minute. The BTT005 will enter standby mode if no device is detected and paired within 1 minute.
- BTT005 can remember 8 paired devices, when the number of paired devices exceeds 8, the first one will be replaced.
- BTT005 can pair with Bluetooth stereo receivers with the following PIN numbers: "0000", "1234", "1111", or "8888".

4. Pairing BTT005 with Bluetooth devices

When the BTT005 is in standby mode due to a lost connection, short

press the MFB button one time and it will automatically re-connect to the last connected Bluetooth device.

5. Auto-off

The BTT005 will automatically switch off if not paired with a device within 5 minutes.

6. LED indicator

LED Indicator	STATUS OF BTT005
Red and blue LEDs flash alternately	Pairing mode
Blue LED flashes once every 2 seconds	Standby mode and not connected to a Bluetooth device
Blue LED flashes once every 4 seconds	Connected to a Bluetooth device (Normal mode)
Blue LED flashes once every 2 seconds	Connected to a Bluetooth device (apt-X mode)
Red LED flashes twice every 30 seconds	The battery power is low

Care and maintenance

- Do not expose the transmitter to liquid, moisture or humidity.
- Do not use abrasive cleaning solvents to clean the transmitter.
- Do not expose the transmitter to extremely high or low temperatures.
- Do not dispose of the transmitter in a fire.
- Do not drop or exert excessive force on the transmitter as you may damage the internal circuit.
- Do not attempt to disassemble the transmitter as it will void the warranty.

Troubleshooting

My transmitter will not turn on

- The batteries are low and needs to be recharged.

The sound is cutting out

- The average operating distance for this Class II device is 33 feet (10 meters). Interior walls, wireless routers, and cordless phones can reduce this operating distance.

I cannot pair the speaker with a device.

- This transmitter will only work with devices that support the following Bluetooth profiles: A2DP.

I still cannot get my speaker to work

- Call our Help Desk at 1(888) 992-4639

Specifications

Bluetooth version	Bluetooth V2.1
Bluetooth profiles	A2DP
Bluetooth frequency range	2.4GHz-2.4835GHz
Bluetooth range	10 meters
Charging input voltage	DC 5V
Working time	Up to 10 hours
Charging time	About 3 hours
Dimensions	45×33×8mm
Weight	14g

AZECA®

FCC Part 15
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Warning
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada ICES-003 statement
This Class B digital apparatus complies with Canadian ICES-003.

European Union Directives Conformance Statement
Azeca Corp declares that this product is in compliance with:

- The key requirements and relevant provisions of Directive 1999/5/EC
- All other key EU Directives

LIMITED WARRANTY

Azeca Corp ("Azeca") warrants that (a) its Stereo Bluetooth Transmitter (Model BTT005) will perform substantially in accordance with the accompanying written materials for a period of 6 months from the date of receipt and (b) that Model BTT005 (product) will be free from defects in materials and workmanship under normal use and service for a period of 6 months. In the event applicable law imposes any implied warranties, the implied warranty period is limited to (180) days from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply. Azeca Corp and its suppliers' entire liability and Customer's exclusive remedy shall be, at Azeca Corp's option, either (a) repair, or (b) replacement of the product that does not meet this Limited Warranty and which is returned to the Azeca Corp with a copy of Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, disassembly, or misapplication. Any replacement product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer. This warranty is valid only to the original purchaser of the product in the United States.

TO OBTAIN TECHNICAL SUPPORT OR RETURN INFORMATION

Contact our support team at 1(888) 992-4639
Or email us at support@azeca.com

TO OBTAIN WARRANTY SERVICE

If you purchased the product from a retailer or web retailer and you are returning the product within their return policy period, return the product with original receipt to the retailer or web retailer.

If you are outside the retailers return policy, contact the Azeca support center to receive a Return Authorization number and return address. Returned packages will not be accepted without a Return Authorization number.

THIS WARRANTY DOES NOT COVER:

Normal wear and tear, damage from accidents, negligence, misuse, abuse, acts of God, commercial use, modifications, attempts to repair, connection to an incorrect voltage supply, or cosmetic damage. This warranty also does not cover product sold refurbished or with all faults.

WARRANTY LIMITATIONS

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AZECA CORP AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPECIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL AZECA CORP OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF AZECA CORP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, AZECA CORP AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Contact Azeca Corp:
For customer service please call: 1-800-934-9839
www.azeca.com

Distributed by:
Azeca Corp, 5400 Laurel Springs Pkwy, Suite 1307, Suwanee GA 30024 USA
Copyright © Azeca Corp. All rights reserved. Made in China

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Azeca Corp is under license. Other trademarks and trade names are those of their respective owners.

Other Products by Azeca

Stereo *Bluetooth* Speaker

Play music from your Smartphone or MP3 player



- Answer, redial or mute calls
- Built-in mic for hands-free communication
- Easy-to-reach controls for volume, next/previous track and pause
- Automatically pairs with last Bluetooth device
- Use battery or AC power
- 30 foot range

Retractable Bluetooth Headset with Vibration

Earbud retracts instantly

- Answer, redial, or made voice calls
- Vibrates when a call is received
- Clip-on or hang around neck
- Includes charging cable and case

Stereo *Bluetooth* In-Car FM Transmitter

Play Smartphone or MP3 music through your car stereo

- Answer Smartphone calls, redial or mute
- Built-in mic for hands-free communication
- Integral USB jack charges other devices
- Auto-scan finds best FM frequency
- Auto-pairs with last Bluetooth device

Stereo *Bluetooth* Folding Headset

Play music from your Smartphone or MP3 player

- Answer, redial, mute, or make voice calls
- Extra lightweight – just 1.4 ounces
- Ear fitting, comfortable design
- Easy-to-reach controls
- Folds easily into portable travel case

Visit www.Azeca.com for more information or call customer service at 1(800) 934-9839